


How to attach isPOS/cSPOS to kiosk stand

1. Ensure the bracket is in the **unlocked** position.

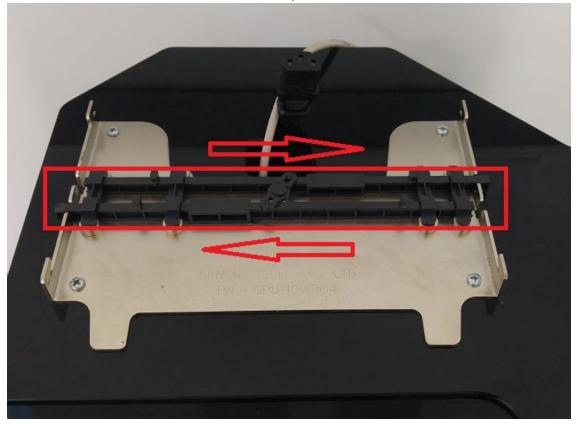


2. Place the unit on the kiosk connecting power and ethernet cables.

P: +61 7 3275 5888

65 & 67 Weaver Street Coopers Plains QLD 4108 F: +61 7 3275 5800 Brisbane, Australia support@senortech.com.au www.senortech.com.au



3. Line up the unit with the bracket shown in the picture below.

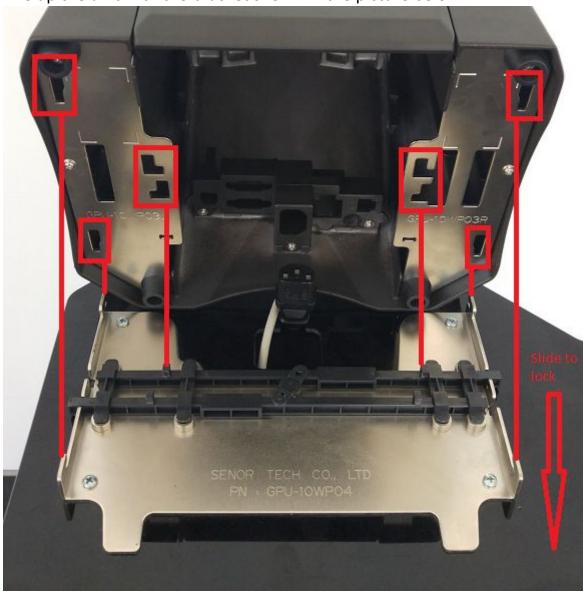

4. Once in position you will need to slide the unit forwards/backwards to be able to lock it in position.

P: +61 7 3275 5888

The Senor Building

65 & 67 Weaver Street Coopers Plains QLD 4108 F: +61 7 3275 5800 Brisbane, Australia support@senortech.com.au www.senortech.com.au



5. Check the side of the bracket and push the locking mechanism so it is flat.



6. Lock in place using the provided screws.



P: +61 7 3275 5888

The Senor Building

65 & 67 Weaver Street Coopers Plains QLD 4108 F: +61 7 3275 5800 Brisbane, Australia support@senortech.com.au www.senortech.com.au

